

**AMTEC**

AT-DC



Tumble  
Dryer

**AT-DC Series (Coin Equipment)**

MODEL : AT-DC-30, AT-DC-50, AT-DC-75

# SPECIFICATION

## Standard Features :

- Micro Computer
- Four Fixed Temperatures:(L, M, H )
- Galvanized Basket (Basket Flat)
- Ball Bearing.
- Durable Mark Resistant Powder Coated Cabinet.
- Heavy Duty Ridged Frame.
- Large Door Opening For Easy Loading.
- Coin Controller System.



## Optional Features :

- Stainless Steel Basket
- Stainless Steel Front Cabinet
- Full Stainless Steel Cabinet Front & Sides
- Energy-Saving Insulation
- Stainless Steel Lint Filter
- Gas Conversion Kit LPgas or Natgas
- Special Voltage Modifications

## Colors Available :



White Silver Blue Orange

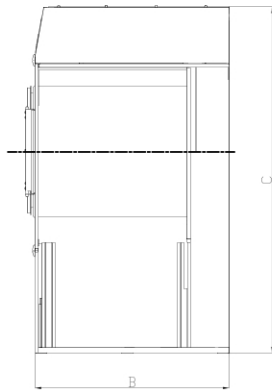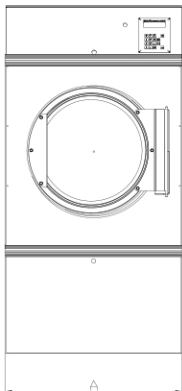

MODEL			AT-DC-30	AT-DC-50	AT-DC-75
<b>Units of Measurement</b>	<b>Matric</b>	<b>US</b>			
Maximum Capacity (dry weight)	kg.	lbs.	15.87(35)	22.7(50)	34(75)
Basket Diameter	mm.	inch	762(30")	922(36.3")	922(36.3")
Basket Depth	mm.	inch	762(30")	762(30")	910(35.8")
Basket Volume	cu.m	cu.ft	0.35(12.4)	0.51(18)	0.61(21.5)
Basket Motor	kW	HP	0.373(0.5)	0.75(1)	0.75(1)
Blower Motor	kW	HP	0.373(0.5)	0.75(1)	0.75(1)
<b>Overall Dimensions :</b>					
A - Machine Width	mm.	inch	805(31.7")	975(38.4")	980(38.6")
B - Machine Depth	mm.	inch	1140(44.9")	1150(45.3")	1270(50")
C - Machine Height at full	mm.	inch	1840(72.4")	1920(75.6")	1920(75.6")
<b>Gas Model :</b>					
Air Flow	cmm	cfm	17(600)	21.25(750)	25.5(900)
Gas Consumption	kcal/hr	btu/hr	22680(90000)	32760(130000)	50400(200000)
Gas Inlet Connection	NPT		1/2"	1/2"	3/4"
Exhaust Duct Connection	mm.	inch	203(8")	203(8")	203(8")
Net Weight (approx.)	kg.	lbs.	294(648.2)	348(767.2)	379(835.5)
Shipping Weight (approx.)	kg.	lbs.	304(670.2)	358(789.3)	390(859.8)
<b>Steam Model :</b>					
Air Flow	cmm	cfm	17(600)	21.25(750)	25.48(900)
Steam Consumption	kg/hr	lb/hr	40.69(89.7)	71.99(158.7)	101.125(224.25)
Steam Supply Connection	NPT		3/4"	3/4"	3/4"
Steam Return Connection	NPT		1/2"	1/2"	1/2"
Exhaust Duct Connection	mm.	inch	203(8")	203(8")	203(8")
Steam Pressure	bar	Psi	5.6-8.79(80-125)	5.6-8.79(80-125)	5.6-8.79(80-125)
Air Pressure	bar	Psi	N/a	N/a	N/a
Net Weight (approx.)	kg.	lbs.	307(676.9)	362(798)	385(848.8)
Shipping Weight (approx.)	kg.	lbs.	304(670.2)	358(789.3)	390(859.8)
<b>Electric Model :</b>					
Air Flow	cmm	cfm	17(600)	21.25(750)	25.48(900)
Electrical Heating Power	kW		24	24	36
Exhaust Duct Connection	mm.	inch	203(8")	203(8")	203(8")
Net Weight (approx.)	kg.	lbs.	308(679)	354(780.4)	382(842.2)
Shipping Weight (approx.)	kg.	lbs.	317(698.9)	364(802.5)	393(866.4)

Specification of design is subject to change without notice. For additional options please consult factory and distributor.

ACCURATE TECHNOLOGIES CO., LTD.

Bangkok, Thailand Phone : +66(0)2740-5511 (Auto) Fax : +66(0)2740-5522, 2740-5533

Website : [www.imagelaundrysystems.com](http://www.imagelaundrysystems.com) Email : [sales@accuratethai.com](mailto:sales@accuratethai.com)