



AT-DE



Tumbler
Dryer

Series 30, 50, 75, 120, 170, 190, 200 Pound

SPECIFICATION

Standard Features :


- Removable top (some model)
- Heavy duty drive system
- Cool down
- Four fixed temperatures
- Galvanized basket
- Sealed ball bearings
- Cast Iron pulleys
- Durable mark resistant powder coated cabinet
- Large door opening

Optional Features :

- Microprocessor control
- Reversing cylinder (standard on DE120-DE200)
- Rotational sensor
- Humidity sensor
- Steam heated, Electrical heated, and Gas heated
- Energy-Saving Insulation
- Stainless steel basket
- Stainless steel front or full cabinets
- Stainless Steel Lint Filter
- Air re-circulating system (DE120-DE200)

MODEL	Metric	US	AT-DE30	AT-DE50	AT-DE75	AT-DE120	AT-DE170	AT-DE190	AT-DE200
Maximum Capacity (dry weight)	kg.	lbs.	15.87(35)	22.7(50)	34(75)	54.4(120)	77.1(170)	86(190)	
Overall Dimensions :									
A - Machine Width	mm.	inch	805(31.7")	973(38.5")	973(38.5")	1200(47.2")	1420(55.9")	1420(55.9")	1616 (63.62")
B - Machine Depth	mm.	inch	1138(44.8")	1150(45.3")	1270(50")	1660(65.4")	1700(66.9")	1970(77.5")	2030(79.92")
C - Machine Height at full	mm.	inch	1740(68.5")	1920(75.25")	1920(75.6")	2084(82")	2380(93.7")	2557(101")	2630(103.5")
Cylinder Information :									
Basket Diameter	mm.	inch	762(30")	922(36.3")	922(36.3")	1130(44.5")	1308(44.5")	1308(51.38")	1500(59")
Basket Depth	mm.	inch	762(30")	762(30")	910(35.8")	1076(42.4")	1080(42.5")	1270(50")	1190(46.85")
Basket Volume	cu.m	cu.ft	0.35(12.4)	0.51(18)	0.61(21.5)	1.08(38.1)	1.45(51.2)	1.71(60.4)	2.1(74.16)
Drive Information :									
Basket Motor	kW	HP	0.373(0.5)	0.75(1)	0.75(1)	0.75(1)	1.5(2)	2.2(3)	
Blower Motor	kW	HP	0.373(0.5)	0.75(1)	0.75(1)	2.2(3)	5.5(7.5)	5.5(7.5)	
Gas Model :									
Air Flow	cmm	cfm	17(600)	21.25(750)	25.5(900)	60.2(2200)	113.27(4000)	113.27(4000)	150(5300)
Gas Consumption	kcal/hr	btu/hr	22680(90000)	32760(130000)	50400(200000)	94500(375000)	123480(490000)	123480(490000)	132300(525000)
Gas Inlet Connection	NPT		1/2"	1/2"	3/4"	1"	1"	1"	1-1/4"
Exhaust Duct Connection	mm.	inch	203(8")	203(8")	203(8")	305(12")	406(16")	406(16")	406(16")
Net Weight	kg.	lbs.	294(648)	348(767)	379(836)	682(1504)	1016(2240)	1150(2535)	1216(2681)
Domestic Shipping Weight	kg.	lbs.	304(670)	358(789)	390(856)	702(1548)	1046(2306)	1180(2601)	1246(2747)
Steam Model :									
Air Flow	cmm	cfm	17(600)	21.25(750)	25.48(900)	77.9(2750)	113.26(4000)	184(6500)	184(6500)
Steam Consumption	kg/hr	lb/hr	41(90)	72(159)	101(224)	204(449)	297(655)	423(933)	423(933)
Steam Supply Connection	NPT		3/4"	3/4"	3/4"	1"	1"	2"	2"
Steam Return Connection	NPT		1/2"	1/2"	1/2"	3/4"	3/4"	1-1/4"	1-1/4"
Exhaust Duct Connection	mm.	inch	203(8")	203(8")	203(8")	305(12")	406(16")	406(16")	406(16")
Steam Pressure	bar	psi	8.6(125)	8.6(125)	8.6(125)	8.6(125)	8.6(125)	8.6(125)	8.6(125)
Air Pressure	bar	psi	N/A	N/A	N/A	6-8(87-116)	6-8(87-116)	6-8(87-116)	6-8(87-116)
Net Weight	kg.	lbs.	307(677)	362(798)	385(849)	731(1612)	1042(2297)	1166(2571)	1229(2709)
Domestic Shipping Weight	kg.	lbs.	315(694)	372(820)	396(873)	751(1656)	1072(2363)	1196(2637)	1259(2776)
Electric Model :									
Air Flow	cmm	cfm	17(600)	21.25(750)	25.48(900)	60.1(2150)	N/A	N/A	
Electric Consumption	kW		24	24	36	72	N/A	N/A	
Exhaust Duct Connection	mm.	inch	203(8")	203(8")	203(8")	305(12")	N/A	N/A	
Net Weight	kg.	lbs.	308(679)	354(780)	382(842)	702(1548)	N/A	N/A	
Domestic Shipping Weight	kg.	lbs.	317(699)	364(802)	393(866)	722(1592)	N/A	N/A	

Specification of design is subject to change without notice. For additional options please consult factory and distributor.

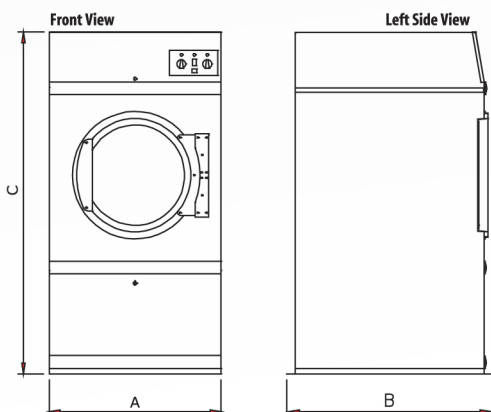

ACCURATE TECHNOLOGIES CO., LTD.

Bangkok, Thailand Phone : +66(0)2740-5511 (Auto) Fax : +66(0)2740-5522, 2740-5533

Website : www accuratethai.com Email : sales@accuratethai.com